

Hisense

22000
BTU

Window Air Conditioner
With Inverter technology &
ConnectLife App
1200 SQ. FT
Model AW2223TW3W

Significant Features

- 2 year warranty – twice as long as others
- Less energy consumption and stable temperature control thanks to inverter technology
- ConnectLife app allows easy control on your mobile phone anytime, anywhere
- 3 different modes (Cooling, Fan, Dehumidifier) for flexible usage
- Fan mode for better air circulation
- Dehumidifier mode to remove excess moist
- Washable, removable filter for easy maintenance
- 4-way air direction provides even distribution of cool air
- Meets ENERGY STAR® standards, saving on energy costs



2 Year Warranty



Inverter Technology



3 Modes – Cool,
Fan and Dehumidifier



ConnectLife
Smart App



250 Volt/ 15 Amps.



E Star Certified



The Hisense AW2223TW3W Window Air Conditioner with inverter technology, best suited for large rooms (550 sq. ft. or less) with 22,000 BTU of cooling power, is packed with various efficient, easy to use features. Hisense inverter technology saves energy and maintains stable temperature at desired level by varying rotation speed of compressor. E-star certified air conditioner can reduce energy consumption, which in turn, helps to save money. With ConnectLife app on your mobile phone, you can turn on/off your air conditioner or adjust the setting wherever, whenever. The maintenance is simple thanks to the washable and removable filter. 2 year warranty on both parts and labor is another reason why you should buy Hisense air conditioner!

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved

Hisense

1200
SQ. FT

Window Air Conditioner

22,000 BTU

Model AW2223TW3W

Performance

| | |
|-------------------------------|-------------|
| Cooling Capacity (BTUs/hr) | 22,000 |
| CEER | 15 |
| Coverage | 1,200 sq ft |
| Dehumidification Pint / 24 hr | 93.6 |
| Refrigerant | R-32/ 630g |
| Airflow (CFM) (High/ LOW) | 405-495 |
| Noise Level (dB) | 44/ 55/ 59 |

Electrical

| | |
|--------------------------|------------------|
| Voltage/ Freq/ Amps | 115V, 60 Hz, 12A |
| Plug Type/ NEMA# | B/ 6-15P |
| Watts-cooling | 2150 |
| Electrical Receptacle | 240V/ 15A |
| Power Cord Length (feet) | 6ft. (1.8m) |

Control Features

| | |
|------------------------|------------|
| Thermostat Type | Electronic |
| Fan Speeds - Cool/ Fan | 3/ 3 |
| Display Type | LED |
| Timer | YES |

Unit Features

| | |
|--------------------|------------------|
| Chassis Type | Slide-out |
| Air Deflection | 4-Way |
| Air Discharge Type | Top |
| Washable Filter | YES, Easy Access |

Accessories

| | |
|------------------|-----|
| Installation Kit | YES |
| Remote Control | YES |

Approvals

| | |
|-------------|-------|
| Safety | cULus |
| Energy Star | YES |

Product Dimensions

| | |
|--------------------------------------|----------------|
| Unit Dimension W x H x D (mm) | 600*455*640 |
| Net Weight (kg) (fits Not included) | 39.5 |
| Unit Dimension W x H x D (inch) | 23.6×17.9×25.2 |
| Net Weight (lbS) (fits Not included) | 87.1 |

Product


| | |
|---------------|--------------|
| Parts & Labor | 2 years |
| UPC | 810088361753 |

Related Images


Simple and easy to use tough control



Window Opening

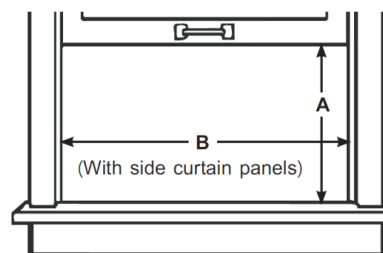

A: 18 1/2" (47.1cm) min
B: 29 3/5" (75.2cm) – 42 1/10" (107cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-888-935-8880
www.hisense-usa.com