

## Significant Features

### More Reliable

- 2 year warranty – twice as long as others

### More Efficient

- Dual hose cools down more efficiently by balancing air pressure
- 4 different modes (Cool, Heat, Fan, Dehumidifier) for flexible usage all year long
  - Cool and heat mode for all year long
  - Fan mode for better air circulation
  - Dehumidifier mode to remove excess moist

### Easier to Use

- Simple and easy to use control panel and remote control
- ConnectLife app allows easy control on your mobile phone anytime, anywhere
- Snap-assembly window kit is a snap to install
- Washable, removable filter for easy maintenance



The Hisense AP55023HR1GD Portable Air Conditioner, best suited for large rooms (550 sq. ft. or less) with 8000 BTU of cooling power, provides more efficient and easier to use features all year long. Innovative dual hose design cools down the room more efficiently by balancing air pressure. 4 different modes provide comfort all year long – Cool mode when you are hot, heat mode when you are cold. Or fan mode for better ventilation. You can also use dehumidifier mode to remove excess moist. The control panel and remote control are simple and intuitive. The maintenance is simple thanks to the washable and removable filter. 2 year warranty on both parts and labor is another reason why you should buy Hisense air conditioner!

|  |                                 |
|--|---------------------------------|
| Model #  | AP55023HR1GD                    |
| <b>Performance</b>                             |                                 |
| Maximum Cooling Space                          | Up to 550 sq ft                 |
| Cooling Capacity -SACC (BTU)                   | 8000                            |
| CEER   | 7.2                             |
| Dehumidification Pint/ 24 hr (At 80°F /50% Rh) | 67 (At 80°F / 50% Rh)           |
| Refrigerant                                    | R32                             |
| Airflow (CFM)                                  | 175~230                         |
| Noise Level in dB                              | 49~51                           |
| <b>Electrical</b>                              |                                 |
| Voltage/ Frequency / Amps                      | 115/ 60/ 12*                    |
| Plug Type / NEMA#                              | LCDI (15A/ 5-15P)               |
| Power Cord Length (Ft)                         | 4.9ft                           |
| <b>Control Features</b>                        |                                 |
| Unit Control Type                              | Electronic                      |
| Fan Control                                    | Button                          |
| Thermostat Control                             | Electronic                      |
| Display Type                                   | LED                             |
| Heating Mode                                   | YES                             |
| Sleep Mode                                     | YES (On the controller)         |
| Dehumidifier Mode                              | YES                             |
| Cooling Speeds                                 | 3                               |
| Temp Display Units                             | °C/ °F                          |
| Timer  | YES                             |
| Auto Restart                                   | YES                             |
| <b>General Features</b>                        |                                 |
| Removable Filter                               | YES                             |
| Washable PP Filter                             | YES, Easy Access                |
| Oscillating Air Vent Louvers                   | YES (On remote)                 |
| Vent System                                    | Double Duct (1 - 5.9" D X 60"L) |
| <b>Accessories</b>                             |                                 |
| Remote Control                                 | YES                             |
| AAA Batteries                                  | YES                             |
| Air Hose                                       | YES (2 - 5.9" Dia X 60"L)       |
| Window Kit                                     | YES                             |
| <b>Approvals</b>                               |                                 |
| Safety   | ETL                             |
| Energy Star                                    | NO                              |

|                                 |                |
|---------------------------------|----------------|
| <b>Product Dimensions</b>       |                |
| Unit Dimension W x H x D (mm)   | 442×738×318    |
| Net Weight (kg)- kits included  | 31.2           |
| Unit Dimension W x H x D (inch) | 17.4×29.1×12.5 |
| Net Weight (lb)- kits included  | 68.8           |
| <b>Product</b>                  |                |
| Parts & Labor                   | 2 years        |
| UPC                             | 819130028354   |


Note:

\*: Rated Amps(A) / according to UL 60335 Safety

### Control Panel



### Window Size

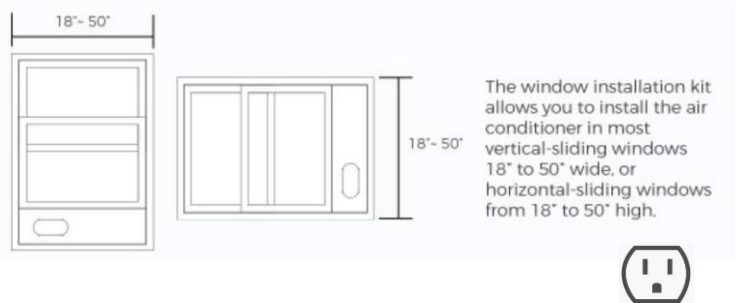

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2021 Hisense USA. All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA. 30024  
1-877-465-3566  
[www.hisense-usa.com](http://www.hisense-usa.com)