Hisense



WINDOW AIR CONDITIONER With ConnectLife App


Model AW1422CW1W 700 Sq. Ft.







- Energy-efficient design helps save money
- Sleek and easy electronic touch controls
- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- ConnectLife smart app allows easy control from anywhere
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort

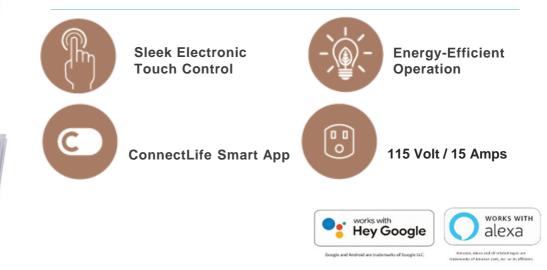

The Hisense AW1422CW1W Window Air Conditioner is best suited for medium rooms (700 sq. ft. or less), delivering 14,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Backed by a 2-year warranty on both parts and labor.

Hisense



Dehumidification Pint/ 24 hr48RefrigerantR-3Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/3Watts-cooling124	2) sq ft 32/510g I-305	
CEER11.1Coverage700Dehumidification Pint/ 24 hr48RefrigerantR-3Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/4Watts-cooling124	2) sq ft 32/510g I-305	
Coverage700Dehumidification Pint/ 24 hr48RefrigerantR-3Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/3Watts-cooling124) sq ft 32/510g 1-305	
Dehumidification Pint/ 24 hr48RefrigerantR-3Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/4Watts-cooling124	32/510g I-305	
RefrigerantR-3Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/4Watts-cooling124	-305	
Airflow (CFM) (High/ LOW)244Noise Level in dB56/Electrical56/Voltage/ Freq/ Amps115Plug Type/ NEMA#A/Watts-cooling124	-305	
Noise Level in dB56/Electrical115Voltage/ Freq/ Amps115Plug Type/ NEMA#A/Watts-cooling124		
ElectricalVoltage/ Freq/ Amps115Plug Type/ NEMA#A/Watts-cooling124	58	
Voltage/ Freq/ Amps115Plug Type/ NEMA#A/Watts-cooling124		
Plug Type/ NEMA#A/Watts-cooling124	Electrical	
Watts-cooling 124	5 - 60/ 11.2, N/A	
	5-15P	
	10	
Electrical Receptacle 115	5V/15A	
Power Cord Length (feet) 6ft.	(1.8m)	
Control Features		
Thermostat Type Elec	ctronic	
Fan Speeds - Cool/ Fan 3/ 3	3	
Display Type LED)	
Timer YES	5	
Unit Features		
Chassis Type Fixe	ed	
Air Deflection 4-W	Vay	
Air Discharge Type Top)	
Washable Filter YES	S, Easy Access	
Accessories		
Installation Kit YES	3	
Remote Control YES	<u>,</u>	
Approvals		
Safety cUL)	
Energy Star NO		

Product Dimensions	
Unit Dimension W x H x D (mm)	480×370×545
Net Weight (kg) (fits Not included)	30.6
Unit Dimension W x H x D (inch)	18.90×14.57×21.46
Net Weight (IbS) (fits Not included)	67.5
Product	
Parts & Labor	2 years
UPC	819130029672

Note:


*: Rated Amps(A) / accorded UL 60335 Safety

Product Images

Sleek Design with Touch Control



Window Opening

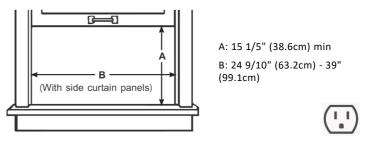

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation 7310 McGinnis Ferry Road, Suwanee, GA,30024 1-888-935-8880 www.hisense-usa.com